



ITA_User Instruction Manual

Cobbler-driver

—Version 1.7 —

Disclaimer

All the contents of this document are protected by copyright owned by NEC Corporation.

Unauthorized reproduction or copying of all or part of the contents of this document is prohibited.

The contents of this document are subject to change without prior notice in the future.

NEC Corporation is not responsible for any technical or editorial errors or omissions in this document.

NEC Corporation do not guarantee accuracy, usability, certainty of the content in this document.

Trademark

- Linux is registered trademark or trademark of Linus Torvalds, registered in the U.S. and other countries.
- Red Hat is registered trademark or trademark of Red Hat, Inc., registered in the U.S. and other countries.
- Apache, Apache Tomcat, Tomcat are registered trademarks or trademarks of Apache Software Foundation.
- Ansible is a registered trademark or trademark of the Red Hat, Inc.

The names of other systems, company name and products mentioned in this document are registered trademarks or trademarks of their respective companies.

The ® mark and TM mark is not specified in this document.

※「Exastro IT Automation」is written as 「ITA」 in this document.

Table of Contents

Table of Contents.....	2
Introduction.....	3
1 Overview of Cobbler driver	4
1.1 About Cobbler	4
1.2 About Cobbler driver	5
2 Cobbler driver console menu configuration	6
2.1 Menu/Screen list	6
3 Cobbler operation procedure	7
3.1 WorkFlow	7
3.1.1 The installation workflow using Cobbler.....	7
4 Cobbler driver function•operation method explanation	10
4.1 Basic console.....	10
4.1.1 Device list	10
4.2 Cobbler Driver console	12
4.2.2 Interface information.....	12
4.2.3 Profile list.....	14
5 Execute installation	15
5.1 Mechanism of installation	15
5.2 Start installation	15
6 Notes of applicational operation.....	17
6.1 The data relay storage path file on Cobbler server side	17
6.2 Change log level	17
6.3 About the maintenance method.....	18
6.3.1 Start/Stop/Restart Cobbler driver Back yard process	18
6.4 Download bootloader file	18
7 Troubleshooting.....	19

Introduction

This document explains the function and the operation method of ITA system.

1 Overview of Cobbler driver

This chapter explains Cobbler and Cobbler Driver.

1.1 About Cobbler

Cobbler is a tool that automates OS installation

By registering installation media and the kickstart file that describes the configuration information during installation on the Cobbler server and distributing the files to devices that connected with network, performing network installation is possible. Installation of operation system becomes more effeciently by utilizing Cobbler.

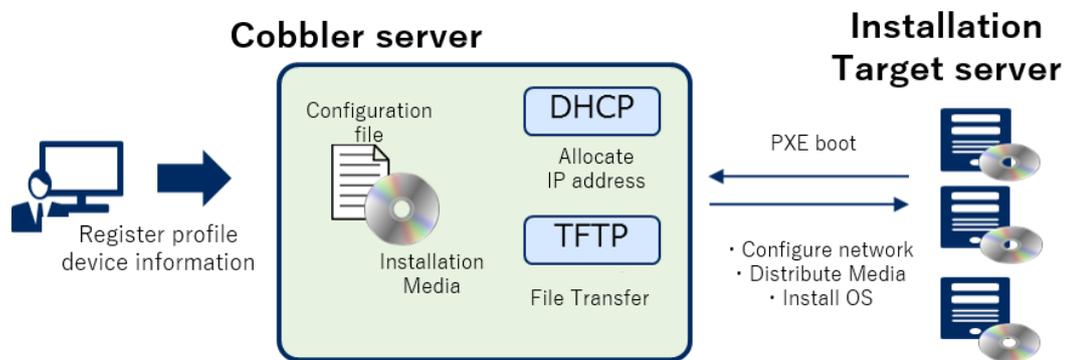


Figure 1.1-1 Overview of Cobbler system

Please refer to the information of Cobbler project from the Cobbler developer for the details of Cobbler and Cobbler driver

1.2 About Cobbler driver

Cobbler driver works as the optional function of ITA system and uses Cobbler to perform OS installation via network to the construction target server device registered in ITA system.

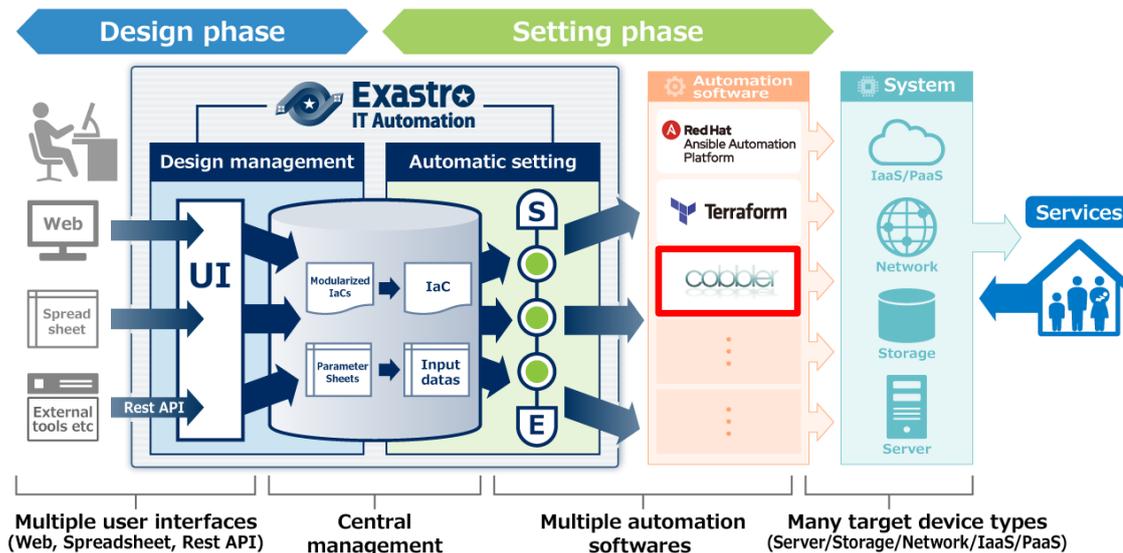


Figure 1.2-1 Overview of ITA system

- Image of utilizing Cobbler, ITA Cobbler Driver

The profile containing the OS installation media and the kickstart file of the installation settings is registered in Cobbler.

Users can view the profile information registered in the Cobbler and can associate the construction target device with profile information in the ITA Cobbler Driver.

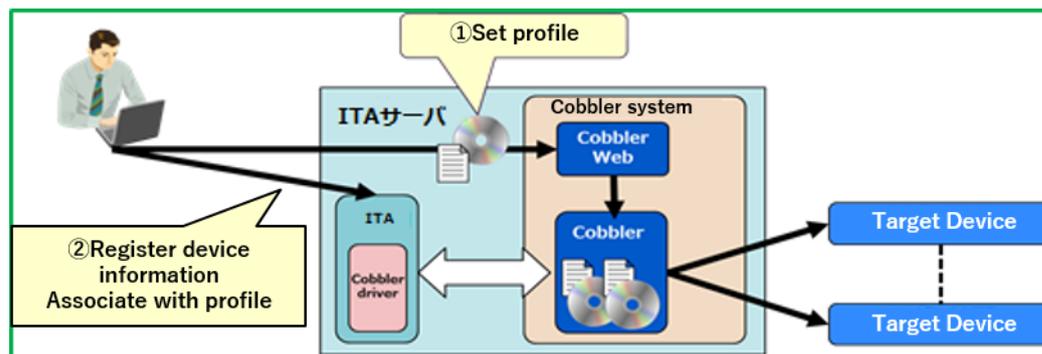


Figure 1.2-2 Image of utilizing Cobbler, ITACobbler Driver

2 Cobbler driver console menu configuration

This chapter explains the configuration of ITA console menu.
For the method to log in Web console and the configuration or basic operations of the menu screen, please refer to the "[User instruction manual Basic console](#)".

2.1 Menu/Screen list

① Menu of ITA basic console

The menu list of ITA basic console used in Cobbler driver is as below

Table 2.1-1 basic console menu/screen list

No	Menu group	Menu · Screen	Description
1	ITA basic console	Device list	Register the parameter required for Cobbler dedicated information with HW device type set to SV
2	ITACobbler console	Interface information	Set the directory of shared file for information association
3		Profile list	Display the list of profile registered in Cobbler

3 Cobbler operation procedure

This chapter explains the operation procedure from setting Cobbler to perform installation to installation target server

3.1 WorkFlow

The standard workflow of each Ansible console is as follows.
The details of each operation is described in the next section.
Please refer to "User instruction manual_Basic console" for how to use the ITA basic console.

3.1.1 The installation workflow using Cobbler

The following is the workflow until the installation operation using Cobbler in ITA environment is executed

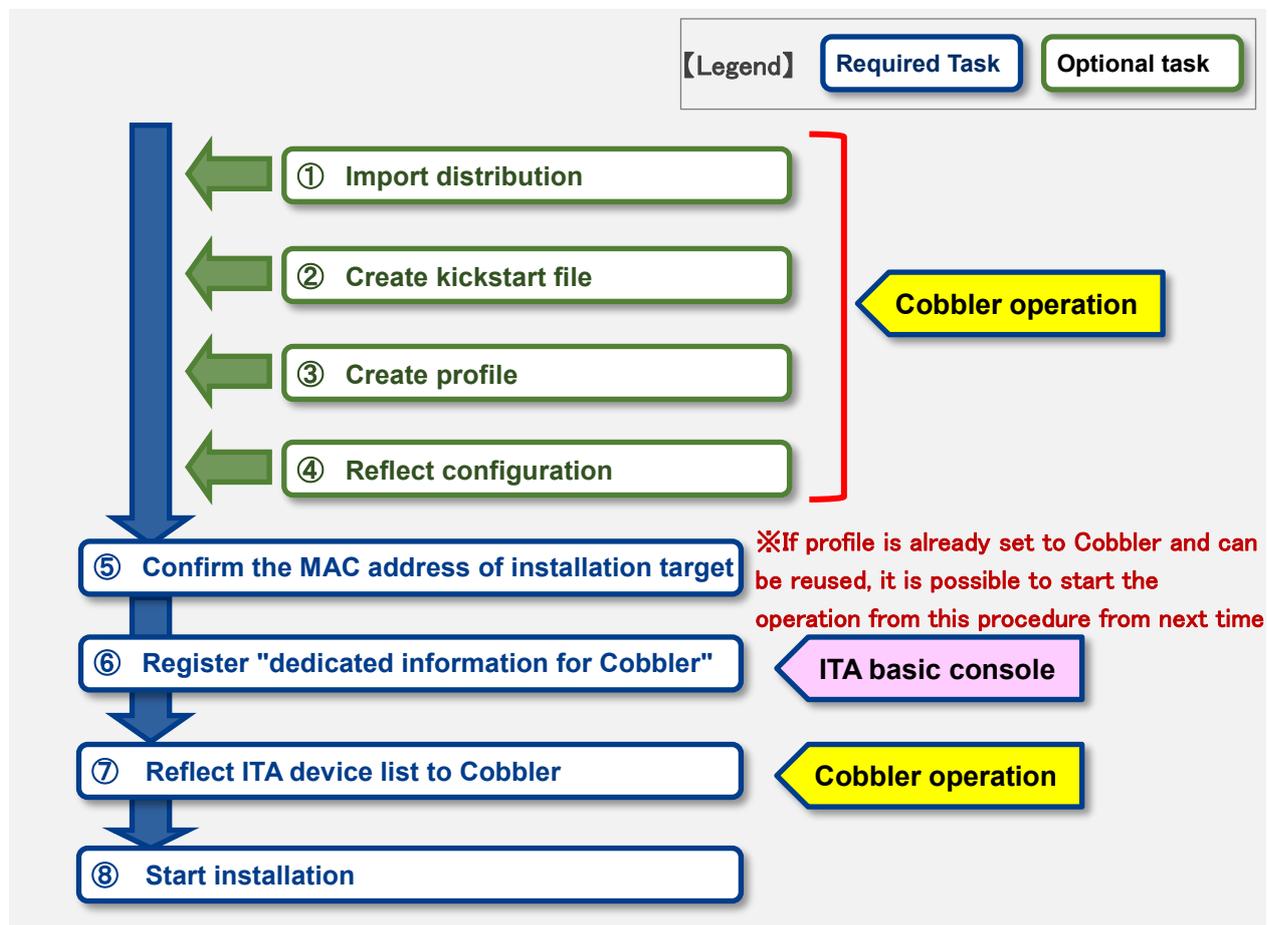


Figure 3.1-1 installation workflow image

- **Workflow details and references**

- ① **Import distribution**

Import the operation system installation media into Cobbler.

- ② **Create kickstart file**

Create the kickstart file which defines the basic information to be set for installation operation in Cobbler.

- ③ **Create profile**

Set the profile that associates with distribution and kickstart file.

- ④ **Reflect configuration**

Enable installation with the setting configured in Cobbler then feedback to ITA.

- ⑤ **Confirm the MAC address of installation target server**

Confirm the MAC address of installation target server which is required for ITA device list registration.

- ⑥ **Register "dedicated information for Cobbler" in device list**

Register the dedicated information for Cobbler to ITA device list.
Please refer to "4.1.1 device list" in this document for details.

- ⑦ **Reflect ITA device list to Cobbler**

Synchronize ITA device list to Cobbler so that installation can be performed with the configuration information registered in ITA device list

- ⑧ **Start installation**

Perform installation and configuration of operation system to the installation target server

■ Legend of register screen item list

Describing the content of the register screen item list in the following section.

① Item	② Description	③ Input required	④ Input type	⑤ Restrictions

① Item

- The item name in the submenu.

② Description

- The description for the item.

③ Input required

- : Items that entering contents are required for them.
- : Items that entering contents are optional for them.

④ Input type

- Manual: Items that require manual input.
- Auto: Items whose content are entered automatically.
- Checkbox: Check box format item.
- Button: Radio button format item.
- List: List box format item.

⑤ Restrictions

- The restrictions for the item(Limitation on number of characters, etc.)

4 Cobble driver function · operation method explanation

This chapter explains each console function used in Cobble driver.

4.1 Basic console

This section describes the operation in ITA basic console.

Please refer to the ITA basic console manual for this operation and perform the operation in the ITA basic console screen.

4.1.1 Device list

- (1) Register/Update/Discard information of operation target host is performed in the "Device list" menu.

This document describes the items (red frame) in the device list that are required for the operation of Cobble driver.

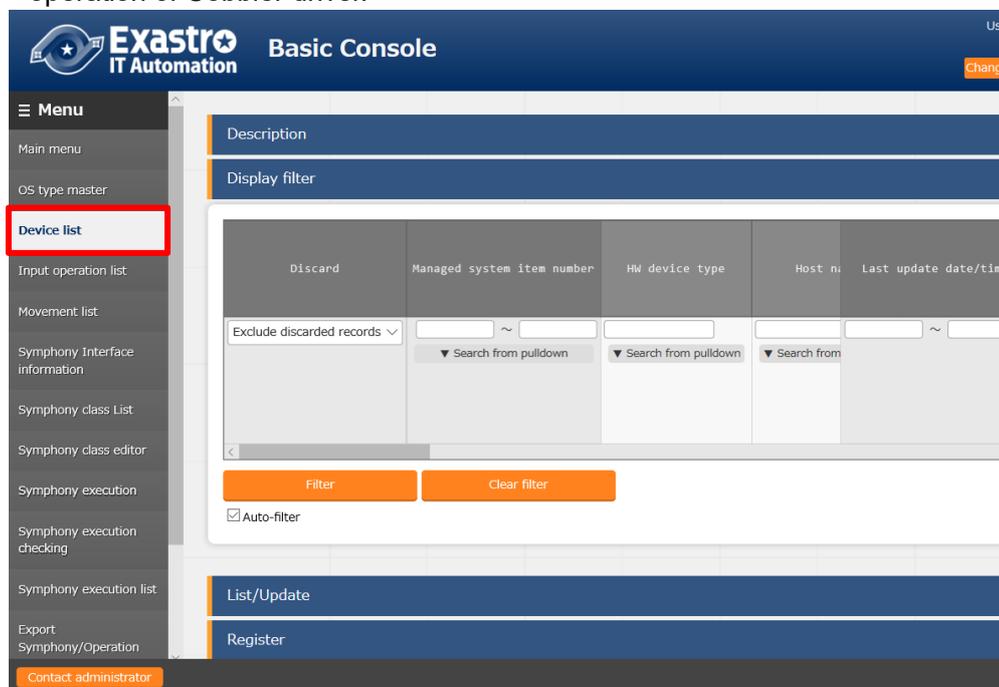


Figure 4.1-1 Submenu screen (Device list)

(2) Click the "Register" - "Start Registration" button to register device information.

Managed system item number	HW device type	Host name*	IP address*	EtherWakeOnLan		Login user ID
				MAC address	Network device name	
Auto-input						

Figure 4.1-2 Registration screen(Device list-common item)

Dedicated information for Cobbler					
Profile	Interface	MAC address	Netmask	Gateway	Static

Figure 4.1-3 Registration screen(Device list-Dedicated information for Cobbler)

(3) The list of common item in registration screen is as follows

Input of the columns with a red asterisk (*) after their column name in the web screen is required. In the case of using Cobbler driver, please enter the "Dedicated information for Cobbler"

If operation is executed while required columns not entered, unexpected errors may occur.

Table 4.1-1 Registration screen item list (Device list)

Item		Description	Input required	Input type	Restrictions
Managed system item number		A unique ID that identifies the registration information is entered automatically	-	Auto	-
host name		Enter host name	○	Manual	Maximum length 128 bytes
IP address		Enter IP address in xxx.xxx.xxx.xxx format	○	Manual	
Dedicated information for Cobbler	Profile	Select the profile used for installation	○	List	Register in Cobbler in advance
	INTERFACE	Enter the network interface name of the installation target server	○	Manual	-
	MAC Address	Enter the MAC address of the installation target server in xx:xx:xx:xx:xx:xx format	○	Manual	-
	NETMASK	Enter the subnet of the network which installation is performed in xxx.xxx.xxx.xxx format	○	Manual	-
	GATEWAY	Enter the default gateway of the network which installation is performed in xxx.xxx.xxx.xxx format	○	Manual	-
	STATIC	Specify the IP address type of the installation target server 0 : DHCP allocated IP address (※) 1 : Static IP address	○	Manual	-

※When specifying "DHCP allocated IP address", please register a temporary value that is not duplicated with other IP address for the IP address column in this screen first then update the IP address again after DHCP allocation.

4.2 Cobble Driver console

This section describes the operation of Cobble Driver console.
Select the Cobble console from the ITA basic console menu.

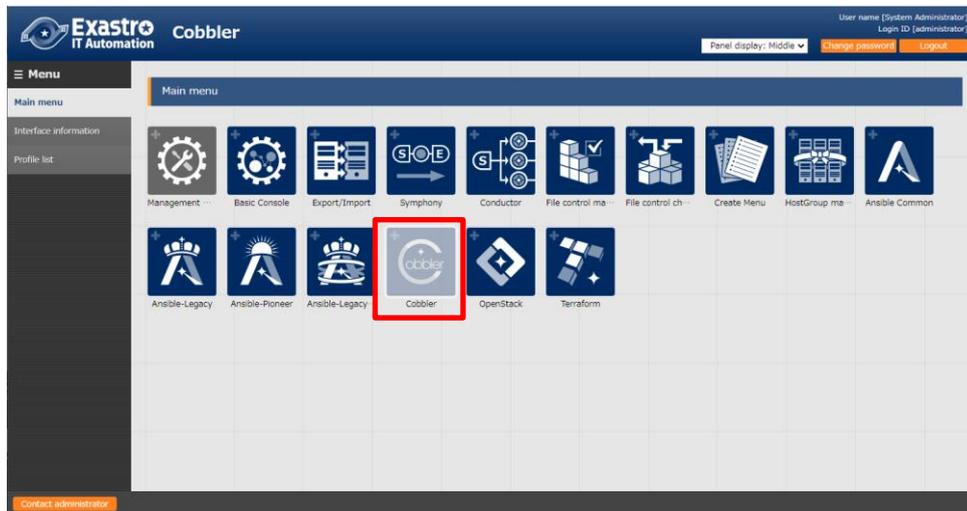


Figure 4.2-1 CobbleDriver menu screen

4.2.2 Interface information

- (1) Register/Update/Discard the path of the shared directory between ITA system, Cobble driver server and Cobble Server and the information to connect to Cobble server. Please refer to "System Configuration/Environment Construction Guide - Cobble-driver" for detailed explanation.

※Since required value are set during installation, basically there is no need to perform any configuration.

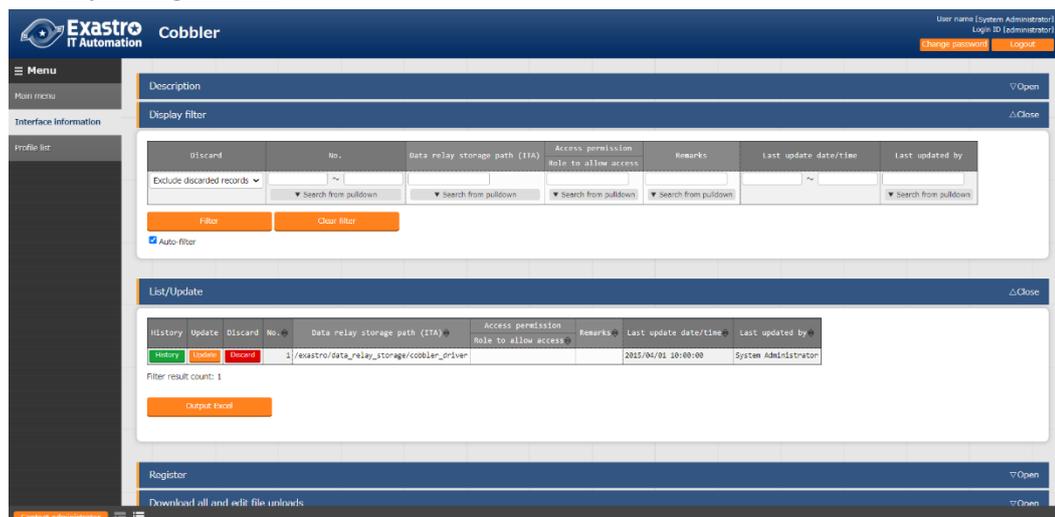


Figure 4.2-2 Cobble Driver interface information screen

(2) Click the "Register" - "Start Registration" button to register the data storage path.

No.	Data relay storage path (ITA)*	Remarks	Last update date/time	Last updated by
Auto-input	<input type="text"/>	<input type="text"/>	Auto-input	Auto-input

Figure 4.2-3 Registration screen (Interface information)

(3) The item list of interface information screen is as follows.
 If operation is executed while interface information not registered or multiple information is registered, **unexpected errors may occur during operation execution.**

Table 4.2-1 Registration screen item list (Interface information)

Item	Description	Input Required	Input type	Restriction
Data relay storage path (ITA) ※1	Enter the directory viewed from the ITA system / Cobbler driver server.	○	Manual	maximum length 128 bytes
Remarks	Free description field.	—	Manual	maximum length 4000 bytes

※1 Data relay storage paths are managed separately because directory path name may be different when operated on different servers. Please refer to "System Configuration/Environment Construction Guide-Cobbler-driver" for details.

4.2.3 Profile list

- (1) Users can check the list of the profile created in Cobbler server in "Profile list" menu.
 ※ Since this screen is for displaying the information imported from Cobbler, there is no configuration in this screen.

Figure 4.2-4 Registration screen (Profile list)

The item list of profile list screen is as follows.

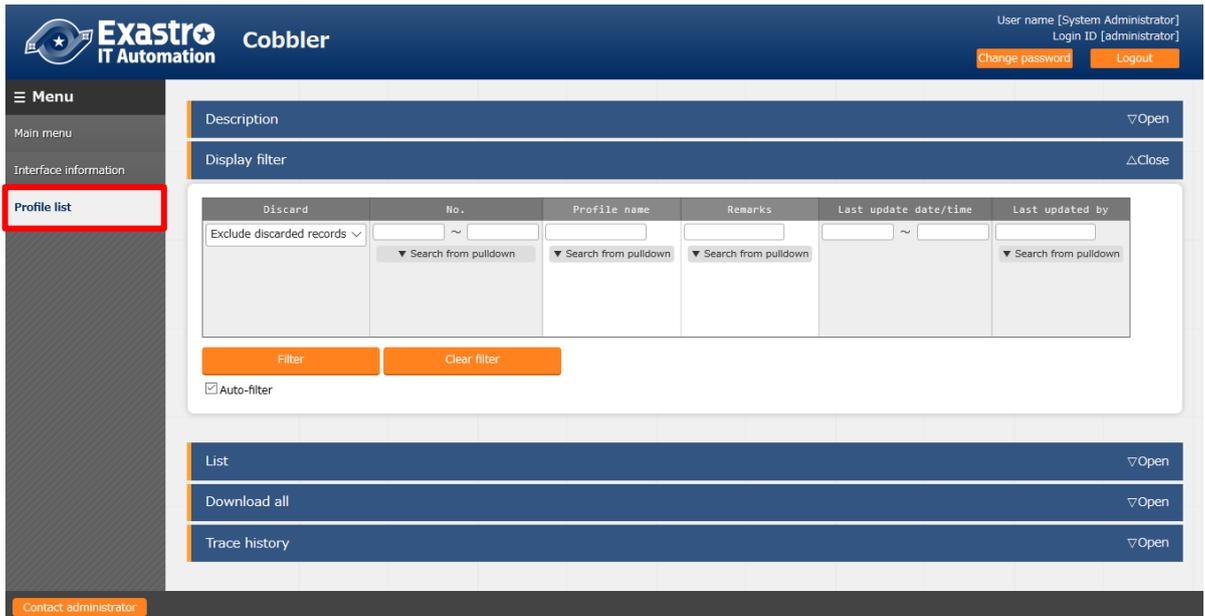


Table 4.2-2 Display screen item list (Profile list)

Item	説明	Input required	Input type	Restrictions
Profile name	The profile name created in Cobbler is displayed. * Since the timing of reflection from Cobbler is not in real-time, it may take some time until items are displayed.	—	—	-
Remarks	Unused.	—	—	-
Last update date/time	The last update date/time of target profile is displayed.	—	—	-
Last updated by	The last updater of target profile is displayed.	—	—	-

Figure 5.1-1 Cobbler automatic installation (Network booting)

- (2) The distribution and the configuration file to be installed is sent from Cobbler, then the installation is performed. After installation, the configuration described in the kickstart file will automatically perform.

```
Starting installer, one moment...
anaconda 21.48.22.121-1 for CentOS 7 started.
* installation log files are stored in /tmp during the installation
* shell is available on TTY2
* when reporting a bug add logs from /tmp as separate text/plain attachments
05:58:21 Running pre-installation scripts
05:58:26 Not asking for UNC because of an automated install
05:58:26 Not asking for UNC because text mode was explicitly asked for in kickstart
Starting automated install.....
Checking software selection
Generating updated storage configuration
Checking storage configuration...

=====
Installation
=====
1) [x] Language settings                2) [x] Time settings
   (Japanese (Japan))                  (Asia/Tokyo timezone)
3) [x] Installation source              4) [x] Software selection
   (http://192.168.1.109/cblr/link      (Custom software selected)
   s/centos7-x86_64)                   6) [x] Kdump
5) [x] Installation Destination        (Kdump is enabled)
   (Automatic partitioning             8) [ ] User creation
   selected)                           (No user will be created)
7) [x] Network configuration
   (Wired (ens160) connected)

=====
Progress
Setting up the installation environment
.
Creating disklabel on /dev/sda
.
Creating xfs on /dev/sda1
[anaconda] 1:main* 2:shell 3:log 4:storage-log 5:program-log  Switch tab: Alt+Tab | Help: F1
```

Figure 5.2-2 Cobbler automatic installation (executing installation)

- (3) The screen will display login prompt after installation. Confirm that the host name is the name set in the ITA device list menu.

```
CentOS Linux 7 (Core)
Kernel 3.10.0-693.el7.x86_64 on an x86_64
Cobbler-TG-1 login: _
```

Figure 5.2-3 Display when installation is finished

6 Notes of applicational operation

The operation to utilizing ITA system contains not only inputs by user from the browser screen of client PC but also operations according to system operation and maintenance.

The available operation and maintenance are as follows.

- The data relay storage path file on Cobbler side
- Change log level
- Maintenance

6.1 The data relay storage path file on Cobbler server side

The file records the directory which used to transfer data with ITA system in Cobbler server is placed in the following directory

`~/ita-root/confs/backyardconfs/cobbler_driver/path_DATA_RELAY_STRAGE_side_Cobbler`

Please rewrite the file when changing the data relay storage path.

At the same time, please change the path referenced on the ITA server side in the Interface information menu of ITA Cobbler console so that the path points to same directory.

6.2 Change log level

The method to change the log level of ITA system independent process is as follows.

① Change to NORMAL level

Rewrite the 8th line of the following file from “DEBUG” to “NORMAL”.

Log level setting file: <insallation direcotory>/ita-root/confs/backyardconfs/ita_env

② Change to DEBUG level

Rewrite the 8th line of the following file from “NORMAL” to “DEBUG”.

Log level setting file: <installation direcotory>/ita-root/confs/backyardconfs/ita_env

After rewriting the file, the change takes effect after restarting the process.

Please refer to next section "6.3 About the maintenance method" for restart.

Log file output destinaton: <installation directory>/ita-root/logs/backyardlogs

6.3 About the maintenance method

6.3.1 Start/Stop/Restart Cobbler driver Back yard process

Taking the function to synchronize the profile list in ITA system for example.

- Start process

```
$/usr/bin/systemctl start ky_cobbler_profileSync_side_ITA ↵
```

- Stop process

```
$/usr/bin/systemctl stop ky_cobbler_profileSync_side_ITA ↵
```

- Restart process

```
$/usr/bin/systemctl restart ky_cobbler_profileSync_side_ITA ↵
```

6.4 Download bootloader file

The bootloader file that is required for Cobbler to work is not downloaded when Cobbler is installed during online installation or offline installation of ITA.

Downloading the bootloader file with the following command is required.

```
$ cobbler get-loaders
```

7 Troubleshooting

No	Contents
Q-1	Unexpected error displayed when registering data in the device list menu.
A-1	Accessing data relay storage path from ITA server failed.
Q-2	The profile in Cobbler is not displayed in the ITA device list menu.
A-2	Please execute Cobbler Sync in Cobbler server.
Q-3	An unexpected IP address allocated to the MAC address registered in the ITA device list.
A-3	The following reasons are possible. ① The MAC address registered in device list is wrong. ② Connecting device with multiple LAN port via the LAN port that is different from the registered MAC address. ③ There are multiple DHCP servers in the connected network.
Q-4	The device information registered in ITA device list is not displayed in "Systems" of Cobbler
A-4	Please execute Cobbler Sync in Cobbler server.
Q-5	PXE boot started but stuck with a green band displayed at the bottom of the screen.
A-5	The description of the kickstart file may be incorrect.